

Introduction

PR5000V UHF RFID reader base on new generation reader technology platform development, combine UHF RFID advanced technology and many years reader application base experience. This reader is more stable and can use in various applications.



Parameter

| | |
|-----------------|---|
| Frequency: | US902928MHz , China920925MHz, EU865867MHz, other frequency selectable |
| Protocol: | ISO18000-6B/6C,EPC G2 |
| RF Power: | 0 ~ 31dBm adjustable |
| Sensitivity: | -80dBm(12dBi antenna more than 12 m) |
| Read Speed: | Multi tag-200pcs/second, single tag 2000 times/minute |
| Processor: | ARM CORTEX M3 100M CPU |
| Memory: | 16KB tag data memory and 32KB ferroelectric memory |
| Data Interface: | 100M Ethernet interface |
| | RS232/RS485 interface wiegand 26/34 |
| | One team input and one team output (TTL) , one team Relay |
| Power Supply: | DC+9V ~ +15V |
| Working Temp: | -20 ~ 60°C |

Functional Description

- **EPC G2 Tag Operation Function**

Reader support EPC G2 tag: Multi-tag query, read, write, selection. Single tag read, write, lock, kill.

- **ISO18000-6B Tag Operation Function**

Reader support ISO18000-6B tag: Multi tag query. Single tag read, write, lock and lock query.

- **Working Parameter Setting**

User can set the parameter of interface, IP address, jump frequency point, output power, reading indication, working mode etc. When in Timing or Trigger mode, can set the parameter of read card type, read area, address, length, output method, output interface.

- **Communication Function**

Support Ethernet, RS232 and RS485 both-way communication interface protocol compliant to UHF RFID reader and PC communication protocol V2.0 Also reader support Wiegand single way data transmission interface, format compliant to Wiegand 26 and Wiegand 34 interface protocol.


- **Off-line Working Mode**

Support Timing read or Trigger read working mode all tags in query area can be read according to set address and length read data direct output or buffer. Read data can selected for filtering same tag. Output data interface can be any one of interface or multiple interface. Meanwhile can configure Relay. Data buffer have power-off function preserves.

- **Maintain and Update Functions**

Support web network server function, can set working parameter on Web page, reader also support serial port and RJ45 port upgrade in the application firmware.

Interface Definition

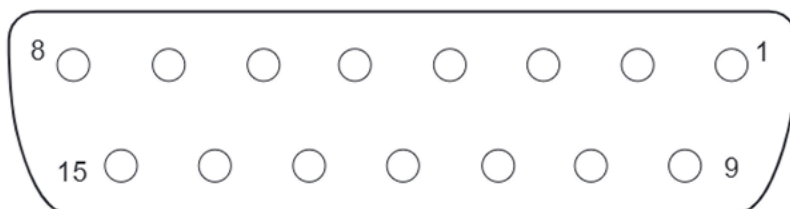


DB15 Pin Diagram

DB15 Pin Function Allocation

| Pin Number | Pin Function |
|------------|-----------------------------|
| 1 | GPIO signal output2 |
| 2 | GPIO signal output1 |
| 3 | Signal ground |
| 4 | RX(RS232) |
| 5 | TX(RS232) |
| 6 | Signal ground |
| 7 | GPIO signal input 2(closed) |
| 8 | GPIO signal input 1 |
| 9 | Signal ground |
| 10 | A+ (RS485) |
| 11 | B- (RS485) |
| 12 | Signal ground |
| 13 | Relay normal close port |
| 14 | Relay common port |
| 15 | Relay normal open port |

Appearance Structure Size Chart (in mm)

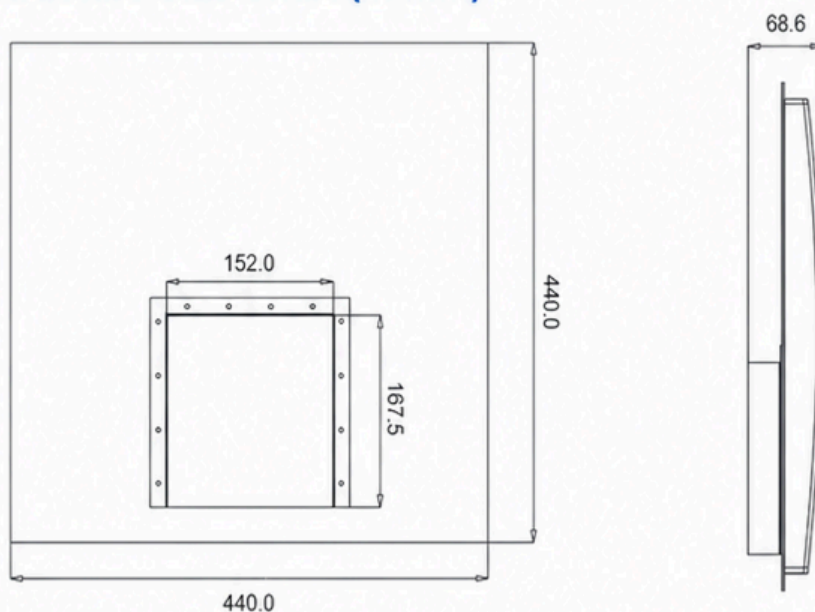

Mailing Address

VOSTOK Trading L.L.C,
304,3rd Floor,Al Tawhidi Building,
Khaled Bin Waleed Road,
P.O. Box: 27106 - Dubai,
UNITED ARAB EMIRATES.

Contact Details

Tel : (+971 4) 3558816
Fax : (+971 4) 3558817
Email : sales@titanhz.com

Social Media

www.facebook.com/pages/Titarhz/151150798404988
plus.google.com/112635276746321262748/posts
titarhz-anpr-systems.blogspot.in
twitter.com/titanHz